
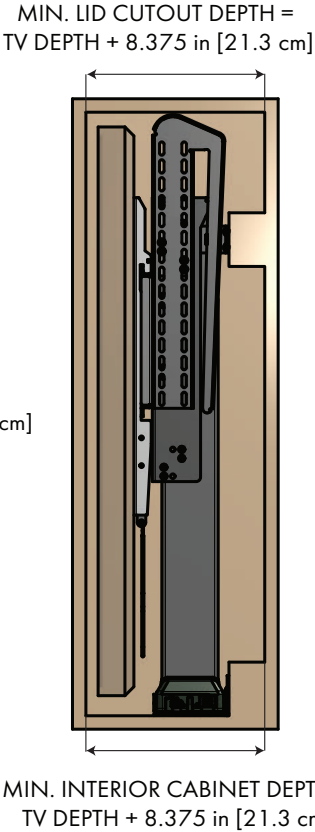


MODEL L-65 DIAGRAM

WITH HINGED TOP GUIDE - PRIMARY CABINET DIMENSIONS

SPECIFICATIONS
MAX WEIGHT CAPACITY : 100 lbs [45.4 kg]
MAX TRAVEL [EXTENSION] : 38.5 in [97.7 cm]
LIFT SYSTEM HEIGHT : 30 in [76.2 cm] TO 41 in [104.1 cm]
MAX TV HEIGHT : 37.75 in [95.9 cm] MINUS LID THICKNESS

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)
TV DIMENSIONS : W____, H____, D____
MIN. INTERIOR CABINET WIDTH : W + 2 in [5.1 cm] = ____ OR 29.5 in [74.9 cm]
MIN. LID CUTOUT WIDTH : _____
MIN. INTERIOR CABINET HEIGHT : H + 2 in [5.1 cm] = ____ OR 30.25 in [76.9 cm]
MIN. INTERIOR CABINET DEPTH : D + 8.375 in [21.3 cm] = ____
MIN. LID CUTOUT DEPTH : _____

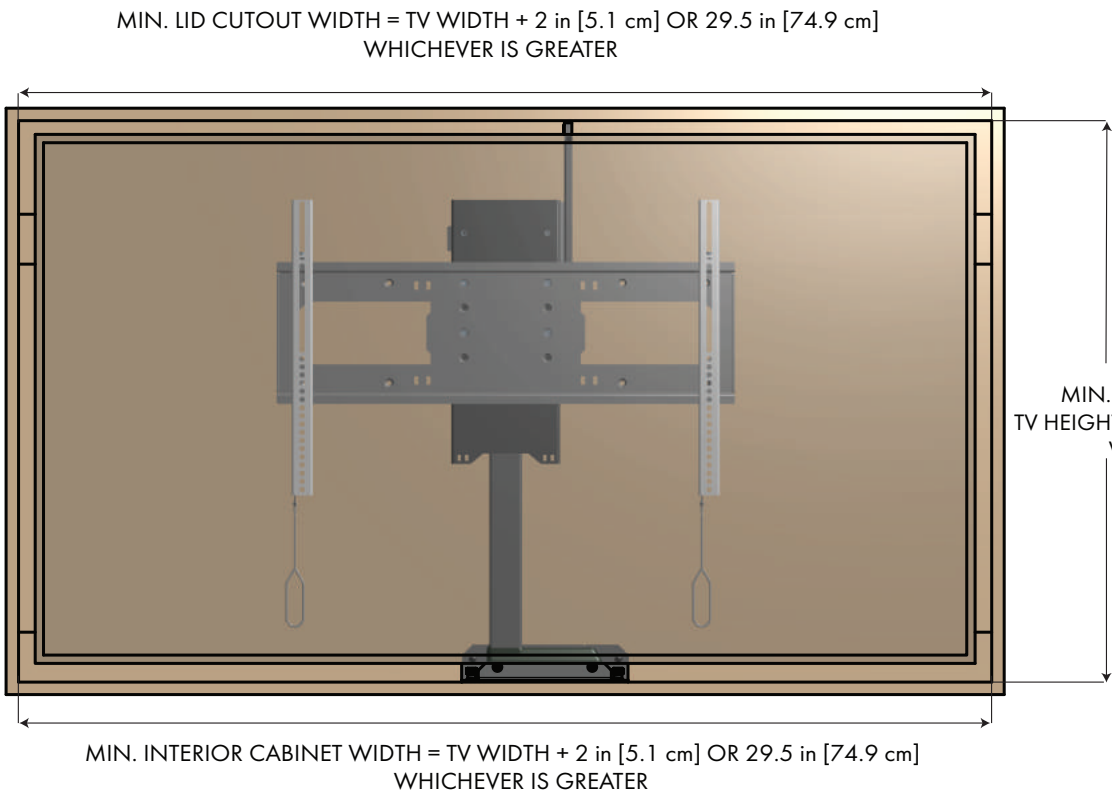


- NOTES:
- 1. THE CABINET BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
 - 2. WHEN DETERMINING TV HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED "TV WITHOUT STAND" HEIGHT
 - 3. LIFT MECHANISM IS POWDER COATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY
- IMPORTANT HINGED LID INFORMATION:
- 1. HINGED LIDS REQUIRE THE USE OF THE "HINGED TOP GUIDE" ACCESSORY
 - 2. HINGES FOR THE LID ARE NOT PROVIDED BY NEXUS 21
 - 3. SEE PAGE 2 OF THIS DRAWING FOR MORE DETAILED INFORMATION ABOUT THE HINGED LID

NEXUS 21

COPYRIGHT 2023 - ALL RIGHTS RESERVED
UPDATED 1/4/24

MODEL L-65 DIAGRAM

WITH HINGED TOP GUIDE - CABINET REFERENCE DIMENSIONS

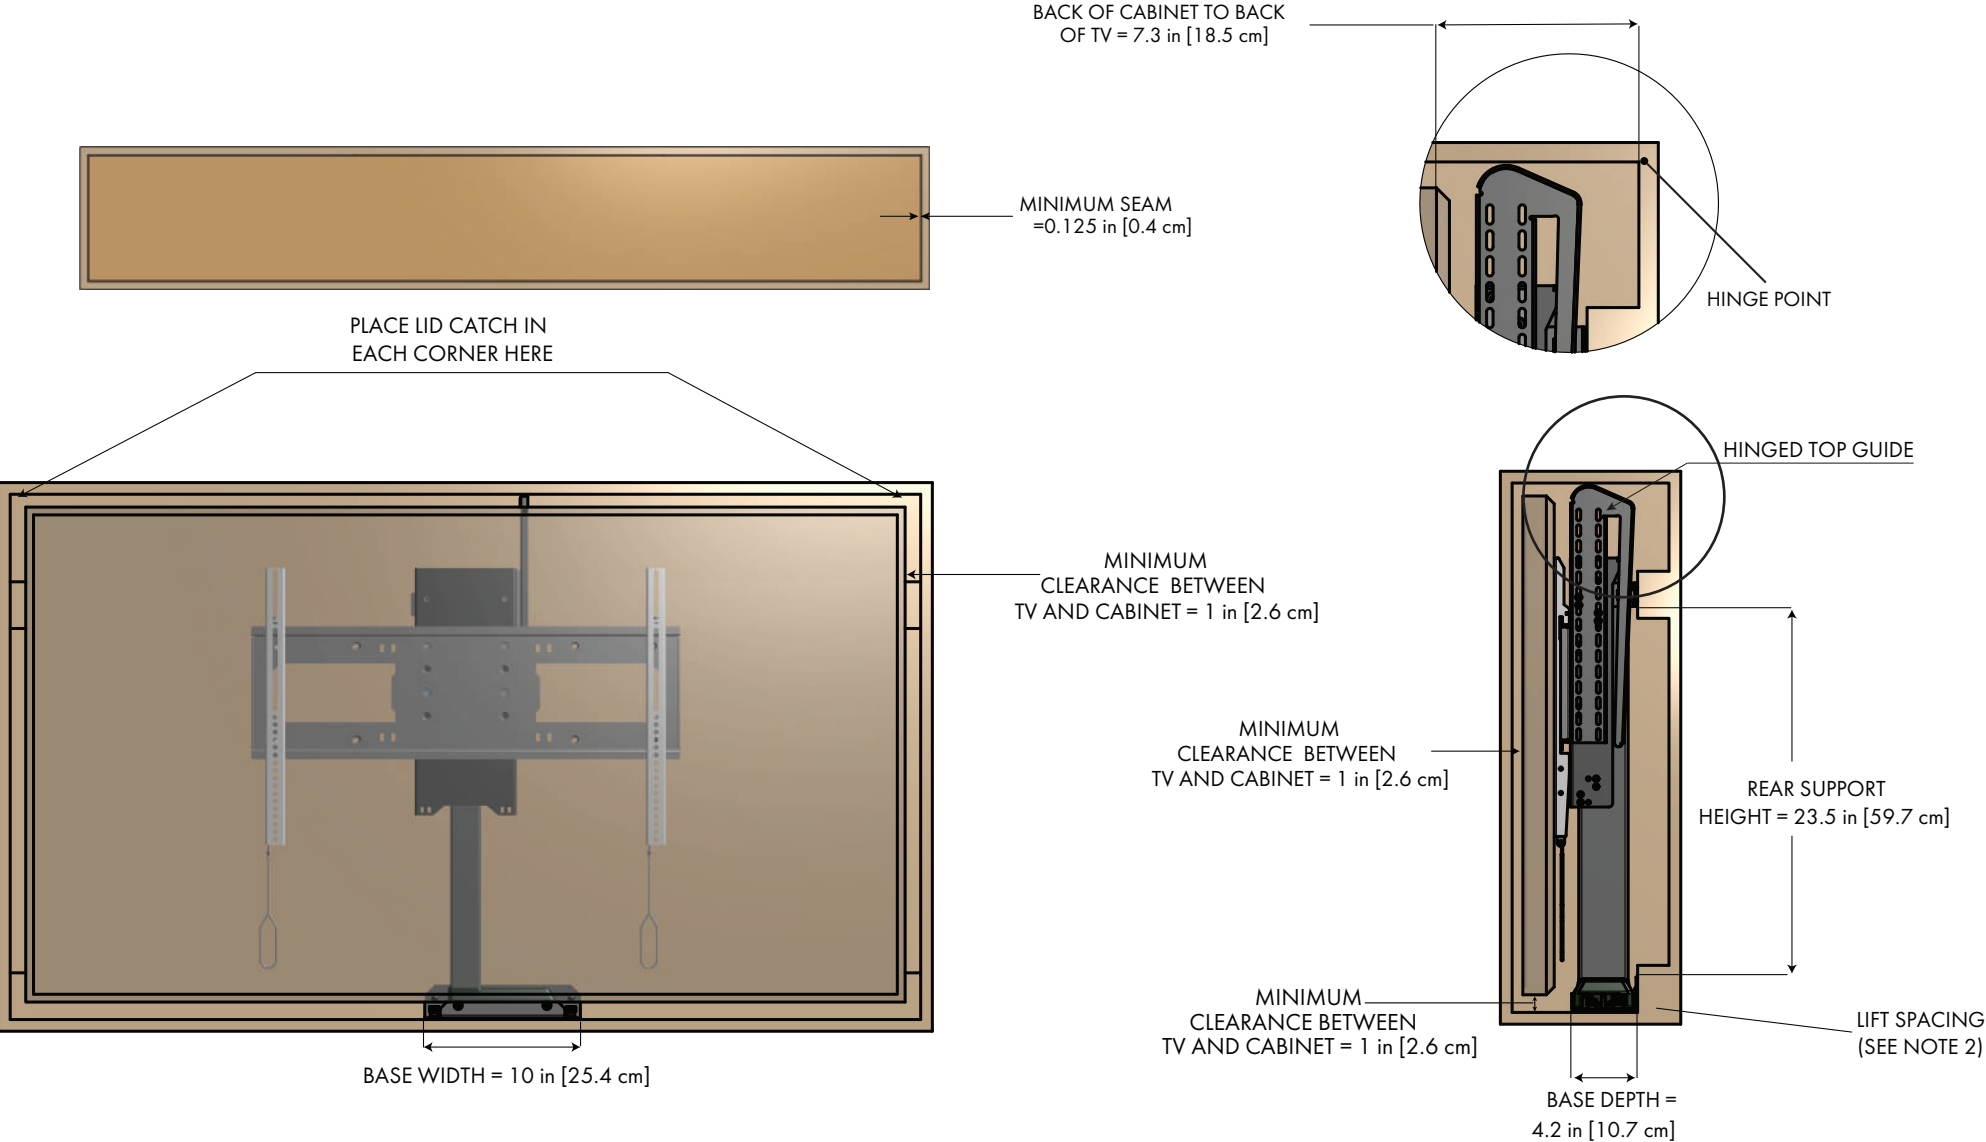

- NOTES:
- 1. HINGED TOP GUIDES CAN BE ADJUSTED WITHIN 0.125 in [0.3 cm] OF THE UNDERSIDE OF LID
 - 2. THE LIFT SYSTEM MUST BE SPACED A MINIMUM OF 2 in [5.1 cm] AWAY FROM THE HINGE POINT REGARDLESS OF CABINET DEPTH
 - 3. THE LID MUST HAVE A LID CATCH TO REST ON IN ORDER TO ENSURE IT STAYS FLUSH WITH THE SURROUNDING CABINET OR COUNTERTOP
 - 4. MINIMUM SEAM CAN BE REDUCED TO 0.0625 in [0.2 cm] WITH A 45 DEGREE BEVEL ON THE LID

NEXUS₂₁

COPYRIGHT 2023 - ALL RIGHTS RESERVED
UPDATED 1/4/24