

MODEL XL-85s DIAGRAM

PRIMARY CABINET DIMENSIONS


SPECIFICATIONS (CENTIMETERS ARE REPRESENTED BY [])

MAX TV SIZE : 86"
 MAX WEIGHT CAPACITY : 175 LBS [79.4 KG]
 MAX TRAVEL [EXTENSION] : 65" [165.1]
 LIFT SYSTEM HEIGHT : 40.75" [103.5] TO 55.5" [141]
 MAX TV HEIGHT : 49" [124.5]
 MANUAL SWIVEL RANGE : +/- 180°

QUICK REFERENCE DIMENSION GUIDE (USE WHICHEVER IS GREATER)

TV DIMENSIONS : W____, H____, D____
 MIN. INTERIOR CABINET WIDTH : $W + 2" [5.1] = \text{____}$ OR 32.5" [82.6]
 MIN. LID CUTOUT WIDTH : $W + 2" [5.1] = \text{____}$ OR 32.5" [82.6]
 MIN. INTERIOR CABINET HEIGHT : SEE CHART ON PAGE 2
 MIN. INTERIOR CABINET DEPTH : $D + 8.5" [21.6] = \text{____}$
 MIN. LID CUTOUT DEPTH : $D + 8.5" [21.6] = \text{____}$


MIN. LID CUTOUT WIDTH = TV WIDTH + 2" [5.1] OR 32.5" [82.6]
 WHICHEVER IS GREATER

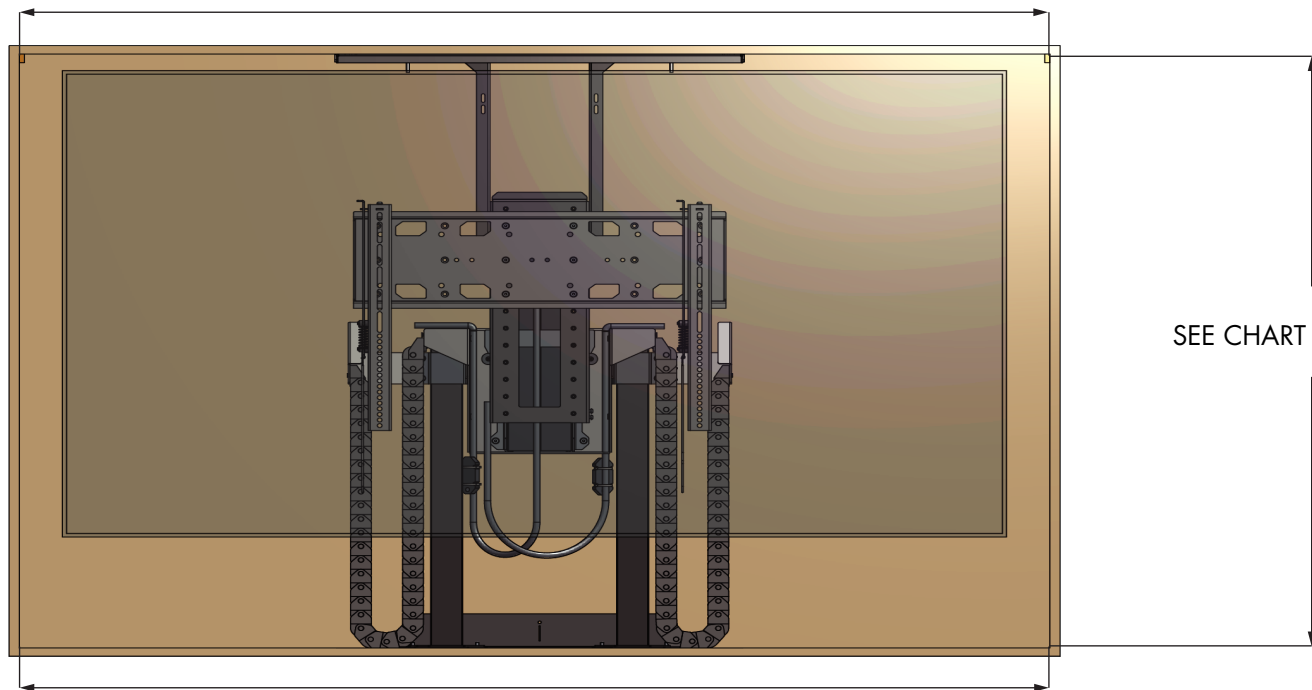

MIN. LID CUTOUT WIDTH = TV WIDTH + 2" [5.1] OR 32.5" [82.6]
 WHICHEVER IS GREATER

SEE CHART ON PAGE 2

MIN. LID CUTOUT DEPTH =
 TV DEPTH + 8.5" [21.6]

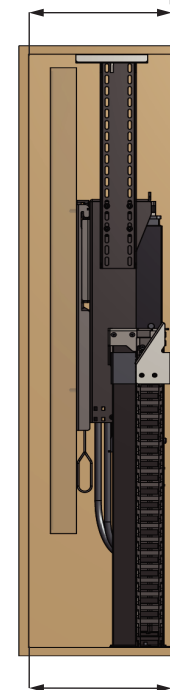

MIN. INTERIOR CABINET DEPTH =
 TV DEPTH + 8.5" [21.6]

NOTES:


1. THE CABINET BOX SHOWN IN THE DIAGRAM IS FOR REFERENCE ONLY AND IS NOT PROVIDED WITH THE LIFT SYSTEM
2. LIFT MECHANISM IS POWDER COATED BLACK STEEL, COLORS IN DIAGRAM ARE FOR CLARITY ONLY
3. LIFT WILL NOT OPERATE WHEN SWIVELED OUTSIDE OF HOME POSITION
4. LIFT ENCLOSURE'S REAR PANEL SHOULD BE CONSTRUCTED TO WITHSTAND A HORIZONTAL LOAD OF 600 LBS [272.2 kg] OR MORE

NEXUS₂₁

COPYRIGHT 2021 - ALL RIGHTS RESERVED
 UPDATED 3/24/21

MODEL XL-85s DIAGRAM

PRIMARY CABINET DIMENSIONS - CONTINUED

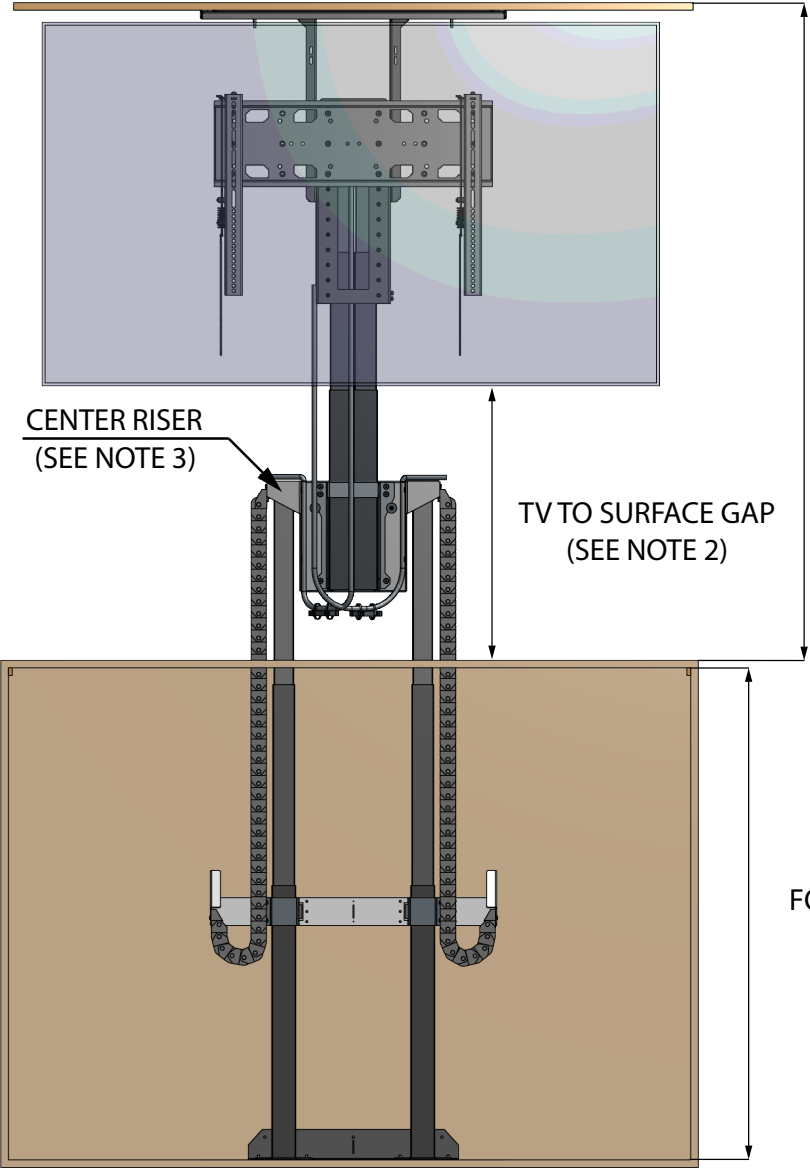

MINIMUM REQUIRED TRAVEL TABLE	
TV HEIGHT	MINIMUM REQUIRED TRAVEL before TV can be swiveled
32" [81.3]	57.25" [145.5]
33" [83.8]	59.75" [151.8]
34" [86.4]	62.25" [158.1]
35" TO 49" [88.9 TO 124.5]	MAX TRAVEL REQUIRED

INTERIOR CABINET HEIGHT TABLE		
TV HEIGHT	MIN INTERIOR CABINET HEIGHT	MAX INTERIOR CABINET HEIGHT
32" [81.3]	40.75" [103.5]	52.5" [133.4]
33" [83.8]		53.5" [135.9]
34" [86.4]		54.5" [138.4]
35" TO 49" [88.9 TO 124.5]	TV HEIGHT + 6" [15.3]	55.5" [141]

FOR TV HEIGHT, ALWAYS USE MANUFACTURER SUPPLIED
"TV WITHOUT STAND" HEIGHT


- IMPORTANT NOTES:
1. MINIMUM REQUIRED TRAVEL = THE AMOUNT OF EXTENSION REQUIRED IN ORDER TO SWIVEL THE TV AND CLEAR THE CENTER RISER; USE CHART
 2. MAXIMUM TV TO SURFACE GAP = 63.125" [160.3] MINUS "TV HEIGHT" MINUS "LID THICKNESS"
 3. CENTER RISER WILL BE EXPOSED REGARDLESS OF CABINET SIZE AND TV TO SURFACE GAP
 4. MAX TRAVEL FOR THIS SYSTEM IS 65" [165.1]

NEXUS₂₁

COPYRIGHT 2021 - ALL RIGHTS RESERVED
UPDATED 3/24/21

MODEL XL-85s DIAGRAM

CABINET REFERENCE DIMENSIONS

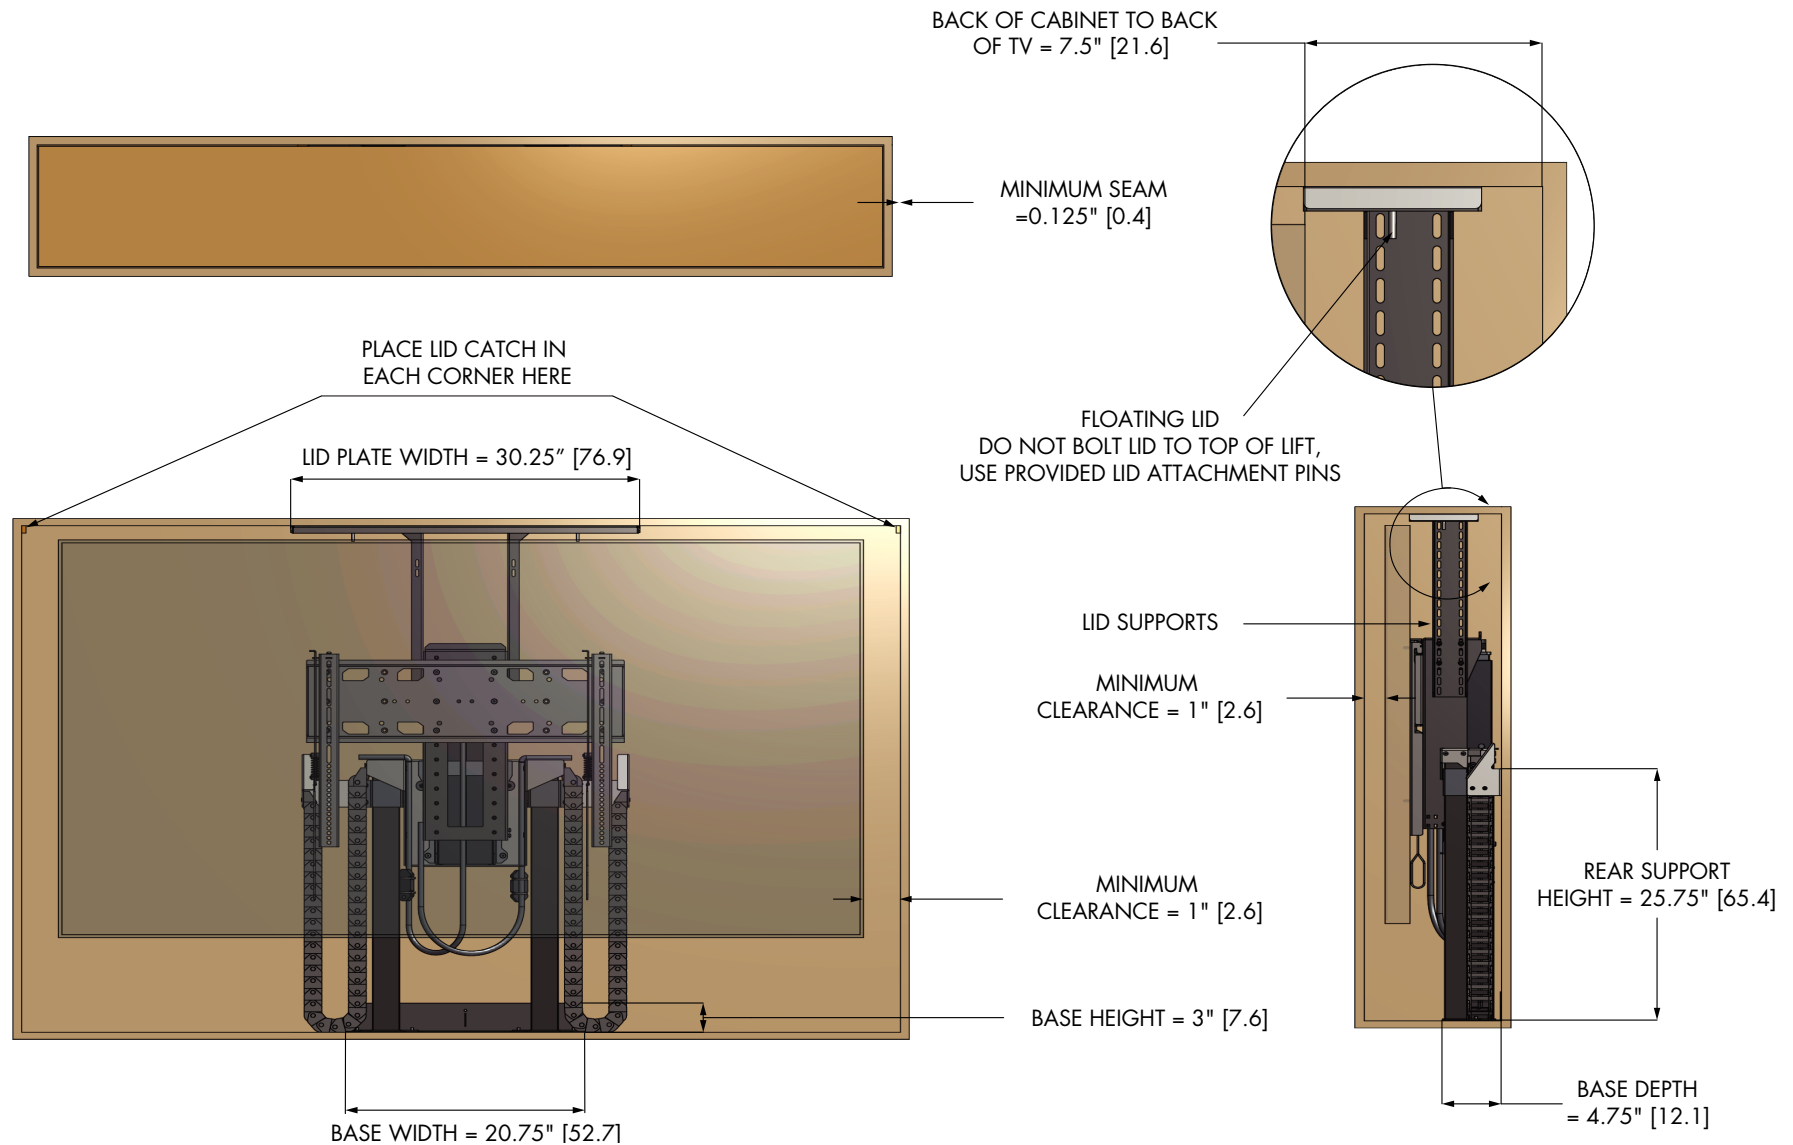

NOTES:


1. LID SUPPORTS ALLOW LID PLATE TO BE ADJUSTED FLUSH WITH UNDERSIDE OF LID
2. LID ATTACHMENT PINS ALLOW LID TO FLOAT WITH THE USE OF LID CATCHES
3. MINIMUM SEAM CAN BE REDUCED TO 0.0625" [0.2] WITH A 45 DEGREE BEVEL ON THE EDGES OF THE LID

NEXUS₂₁


COPYRIGHT 2021 - ALL RIGHTS RESERVED
UPDATED 3/24/21

If Installing Lift Under Floor, You **MUST** Make the Following Modifications

Correct Installation

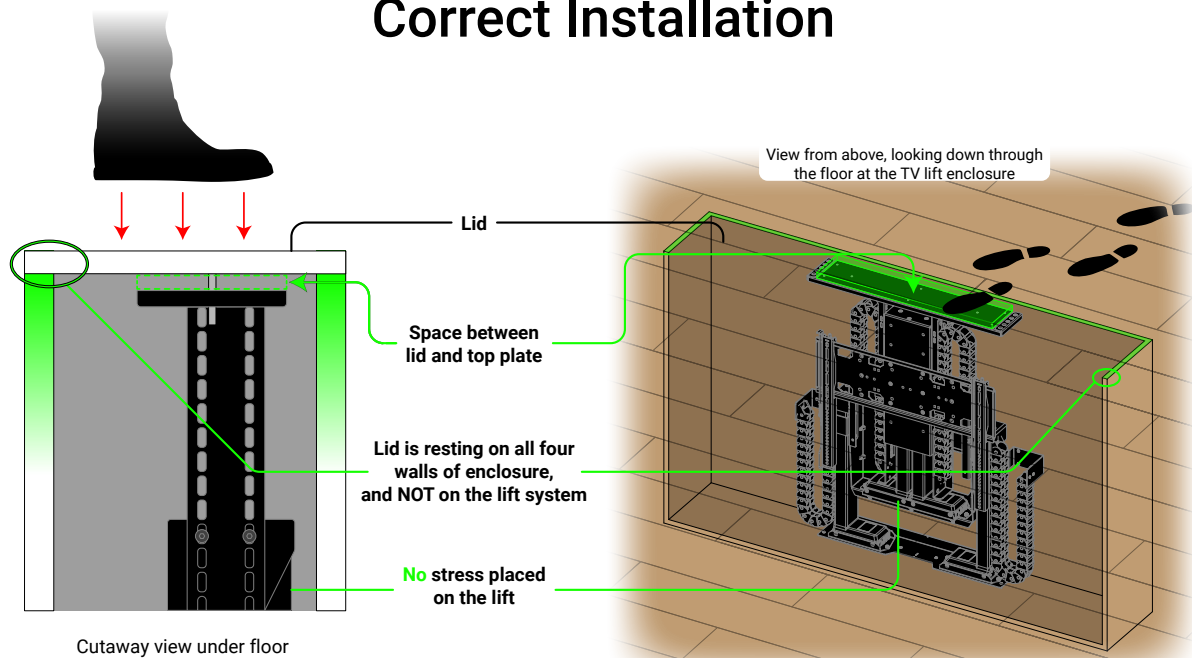

Incorrect Installation

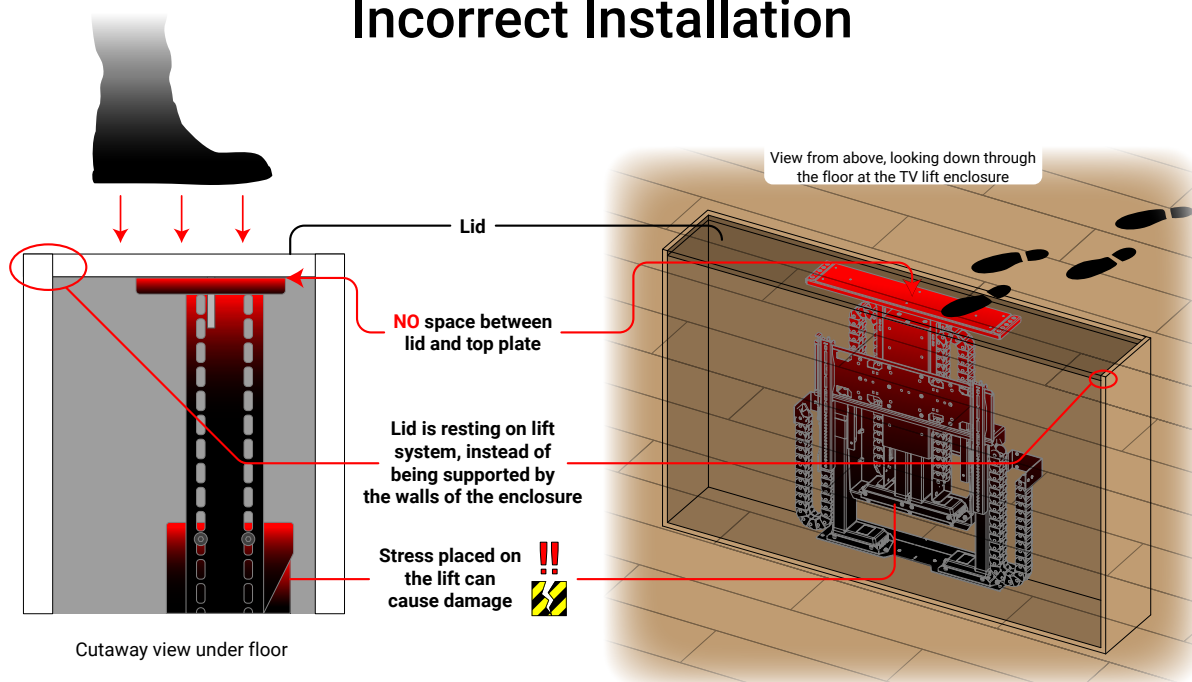

Notes:

1. The lid should be constructed so that it is supported by the walls of the cabinet on all four sides
2. If you have any questions about this please contact our support team at 4803065462